


# Protect 800

Powered by  
**NanoStrike**<sup>®</sup>  
technology

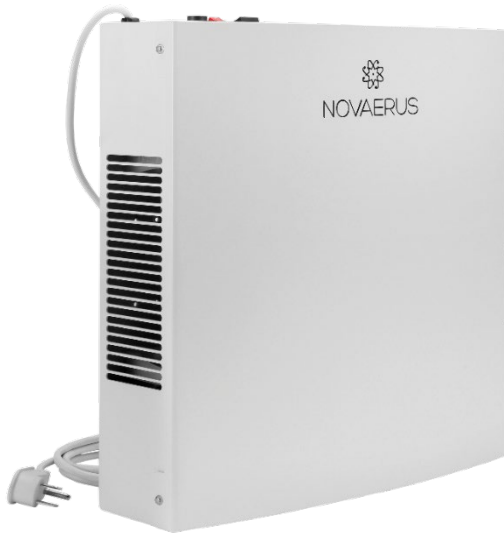

*Designed for continuous air dis-infection and odour control in medium indoor spaces, the Novaerus Protect 800 uses two NanoStrike<sup>®</sup> plasma coils with a 2-speed fan. Can be wall-mounted or placed on a stand and plugs into any outlet.*

## MODEL

Protect 800

Wall mountable, countertop with table stand or mounted on portable high tower stand, supplied with 2m power cord

## SPECIFICATIONS

### ELECTRICAL RATING

Single Phase, 220-240 VAC, 50-60 Hz  
Fuse Rated at 250 VAC, 3 Amps, Listed

### POWER CONSUMPTION

Maximum 14W

### CONSTRUCTION + COLOUR

Precision-cut fabricated metal casing in a white anti-bacterial powder coat finish

### DIMENSIONS + WEIGHT

36.6 cm (h) × 36.5 cm (w) × 11.4 cm (d)  
4.7kg

### ELECTRICAL CONNECTION

Switched and fused with a grounded, moulded power cord

### FAN AIR FLOW VOLUME

Speed I = 220 m<sup>3</sup>/hr  
Speed II = 260 m<sup>3</sup>/hr

### NOISE LEVEL

Speed I = 40 dB  
Speed II = 45 dB

### OPERATING CONDITIONS

10-35°C, 10-75% Relative Humidity

### SHIPPING / STORAGE CONDITIONS

5°C-50°C, Maximum 95% Relative Humidity

### QUALITY + SAFETY

Manufactured under ISO 9001, ISO 14001 & OHSAS 18001.

Conforms to the Medical Device Directive (MDD) 93/42/EEU

IEC 60601-1, Third Edition

IEC 60601-1-2, Fourth Edition

CE Mark

