



# Plasma Air 7100 / 7200 / 7300 / 7400 IONIZATION PRODUCT SUBMITTAL

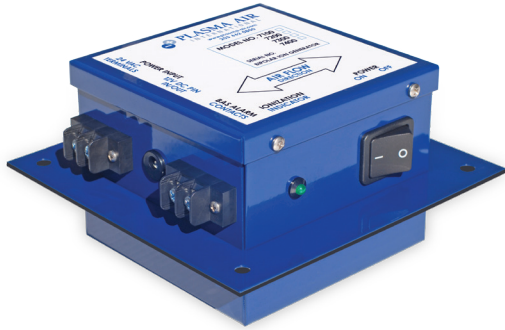

The Plasma Air 7000 Series **Models 7100 / 7200 / 7300 / 7400** needlepoint ionizers are rated up to 6000 CFM and produce positive and negative ions neutralizing harmful pathogens, pollutants and odors. They are typically installed in supply ducts utilizing the pre-drilled flange and factory applied gaskets and can also be installed inside an HVAC unit utilizing a contractor supplied mounting bracket. The 7000 series is UL2998 validated for zero ozone emissions.



## SPECIFICATIONS:

**Airflow Capacity:** ..... Up to 1,400 CFM (7100)  
 ..... 1,401 to 2,800 CFM (7200)  
 ..... 2,801 to 4,200 CFM (7300)  
 ..... 4,201 to 6,000 CFM (7400)

**Pressure Drop:** ..... Less than 0.01 In. WG

**Housing Material:** ..... 18 Gauge steel powder coated

**Weight:** ..... 2 lbs

**Maximum Operating Temperature:** ..... 200° F (93°C)

**Electrical:**

Voltage ..... 24V AC input (7XX1)  
 ..... 120V AC wall pack (7XX2)  
 ..... 120V/240V AC power supply (7XX3)  
 ..... 277V AC to 12V DC power supply (7XX4)

Power Consumption: Less than 2VA per set of outputs

Current Draw: ..... 30 mA at 12V DC

Frequency: ..... 50/60 hertz

Internal Fuse: ..... Auto reset 1 amp

BAS Monitoring: ..... Dry contact terminals

**Ionization Output:**

Mode of Operation: ..... Needlepoint


Needle Configuration: ..... Recessed

No. of Ionization Modules: ..... 1 (7100)  
 ..... 2 (7200)  
 ..... 3 (7300)  
 ..... 4 (7400)

**DIMENSIONS:** See Figure 1


**APPROVALS:** UL2998, Intertek/ETL Standard UL 867

## ORDERING NOMENCLATURE:

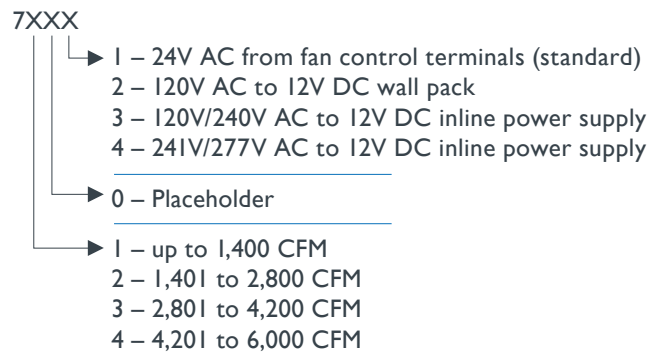

**FEEDBACK FUNCTIONALITY:** The feedback function provides an electronic signal only when the ionizers are operating properly, i.e. when the ionizer is creating ions. The products use this signal to power the LED and initiate a relay that closes dry contacts.

FIGURE 1

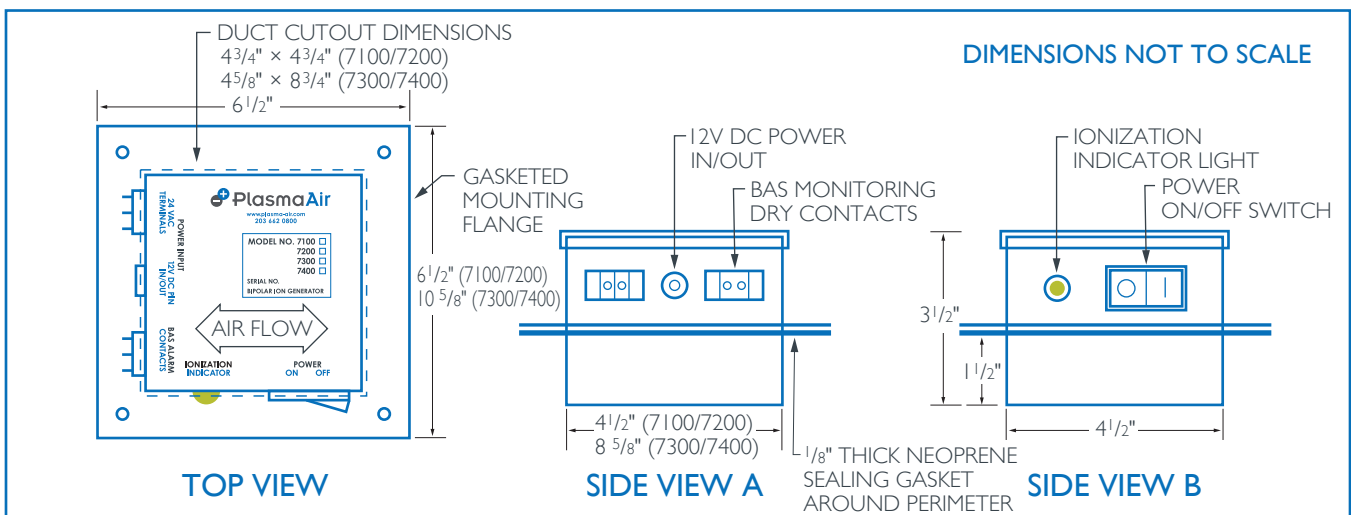

All stated specifications are subject to change without notice or obligation.



PLASMA AIR 35 MELROSE PLACE, STAMFORD, CT 06902  
 phone 203-662-0800 fax 203-662-0808 www.plasma-air.com info@plasma-air.com

PLA-COM-US-SUB-011-REV2



© 2021 All rights reserved